

BENLEE

BENLEE has built a reputation for crafting tough, long-lasting work trailers, and our dump trailers are no exception. From the construction and mining industries to agriculture and waste management, our heavy-duty full-frame end dump trailers are ready to tackle the most demanding jobs.

Each BENLEE dump trailer is precision-engineered for top performance, unmatched uptime, and exceptional durability. Designed to transport everything from gravel and sand to scrap materials, our trailers feature Hardox[®] steel in the floors and walls for increased dent resistance and reduced weight. With radius corners for easy clean-out and BENLEE's extremeduty components, they're built to carry the heaviest loads while maximizing longevity.


For added peace of mind, we offer a 6-year frame warranty, the best in the industry. Whether you're in construction, mining, or waste management, when every dollar counts, trust BENLEE for decades of dependable service.



- 76.5k 128k GVW: Built to match the required workload
- 24' 38' Lengths: Wide range to accommodate the contents being hauled
- 2 7 Axle Configuration: Customizable to fit customer need
- 102" Wide Axles: Wider stance for maximum load handling stability
- 25,000 lb. Axles / Suspension: Extreme-duty components used throughout
- Construction: Fabricated full-length frame for complete load support
- Air-Lock Tailgate: Quick, easy and secure latch system
- Secondary Air Filter: Eliminates contamination additional 100k mile ABS warranty
- 5-year Sealed Axle Hubs: Lower cost of ownership, reduced maintenance, higher uptime
- 16-ply Tires / SmartWay Certified: Reduced maintenance, higher uptime
- Fast-Flap Mudflap System: Low maintenance, quick and easy to manage
- Sand Blasted, Primed, Painted: Durable finish that lasts for years

MODEL	AXLE CONFIG.	GVW	OVERALL LENGTH	SIDE HEIGHT	CUBIC YARDS
TRDTSX24-Lead	FFF	89,000 lb.	24′	4' - 7'	up to 50 cu. yd.
5ADPSX19-Pup	FF FFF	65,000 lb.	19′	4' - 7'	up to 40 cu. yd.
4ADTSX28	AFFF	102,000 lb.	28′	4' - 7'	up to 60 cu. yd.
TADTSX38	FF	80,000 lb.	38′	4' - 7'	up to 80 cu. yd.

BENLEE's Dump Trailers have the following tractor/truck requirements: 5th wheel, 7-way electrical connection, gladhand air lines (service and emergency), wet kit (single line: pressure), 30 gal. hydraulic tank, 32 ISO-VG hydraulic oil, oil flow of 25-30 gpm, max. operating pressure of 2,200 psi, and a pump capable of 1,600 to 1,900 rpm (continuous operation). ** **Denotes heavy haul Michigan use****. 38' dump trailer available 2-7 axle configurations.

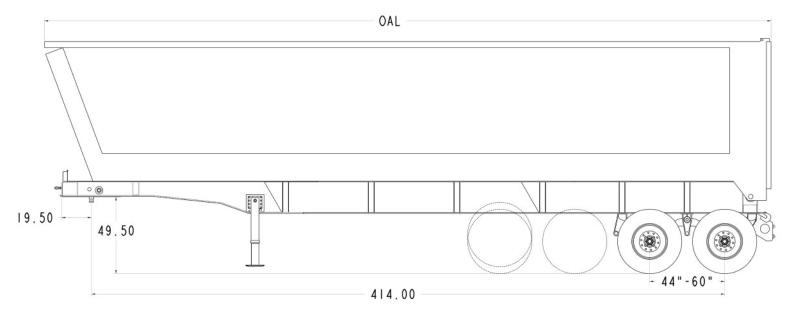

Line drawings for additional dump trailers and dump trailer pup available online.



FEATURED OPTION: Auto Inflation System w/Axle Heat Sensor

A common upgrade that is not required for operation, but highly recommended. Keeps tires inflated to the proper psi while truck is on and trailer connected, even when they incur a slow leak due to nail, rock, etc... Monitors air pressure and visually notifies the operator when there's an issue. The system also monitors temperature inside the axles, to help prevent over heating in the bearings.

- Reduces chance of fire on vehicle itself or unintentionally igniting roadside brush
- Reduces road service calls (fewer flats save time and money)
- Reduces DOT fines for flat tires
- Reduces costly axle damage
- Increases tire life expectancy by as much as 10%
- Increases ability to recap tires (casings are not destroyed)

For more information, visit: www.psitireinflation.com

Model Shown: TADTSX38

AVAILABLE OPTIONS

- Tarp System
- Top Rail Dirt Shedders
- Angled Tailgate
- High-lift Tailgate

- Auto Inflation System w/Axle Heat Sensor
- On-board Scale (air-ride or spring)
- Aluminum Wheels (120 lb. per axle weight reduction)
- 16-ply 11R24.5 Tires, SmartWay Certified

- Wireless Camera System
- Full or Front Skirt
- Lift Axles
- Disc Brakes

Warranty covers against defects in material and workmanship. Wear items are not warrant-able. BENLEE's obligation is limited to repair or replacement of defective parts or components. Purchased components are covered in accordance with the original OEM's warranty policy. All warranty related work, repairs and/or installation must be pre-approved by BENLEE to qualify for reimbursement, then executed by BENLEE or an approved service center. BENLEE also reserves the right to make product improvements or changes at any time, without prior notice.

©BENLEE | www.benlee.com | 30383 Ecorse Road, Romulus, MI 48174 | (734) 722-8100

